

Check valve



Check valve

MG100




Design	- According to ASME B16.34
Size	- From 1/4" to 2"
Rating	- From 800 PSI to 6000 PSI
Ends	- SW in according to ASME B16.11 - NPT or GAS in according to ASME B1.20.1
Materials	- Carbon steel - Stainless steel - Duplex - Superduplex - Incoloy All materials are from bars or forgings
Insert	- SOFT SEATED: viton - ptfe - delrin - METAL SEATED
Main Features	- Face to Face according to Zelling Standard
Additional Features	- Nace requirement



GEAR BOX VERSION

ITEM	DESCRIPTION
1	BODY
2	RING NUT
3	STEM
4	SPRING
5	GASKET

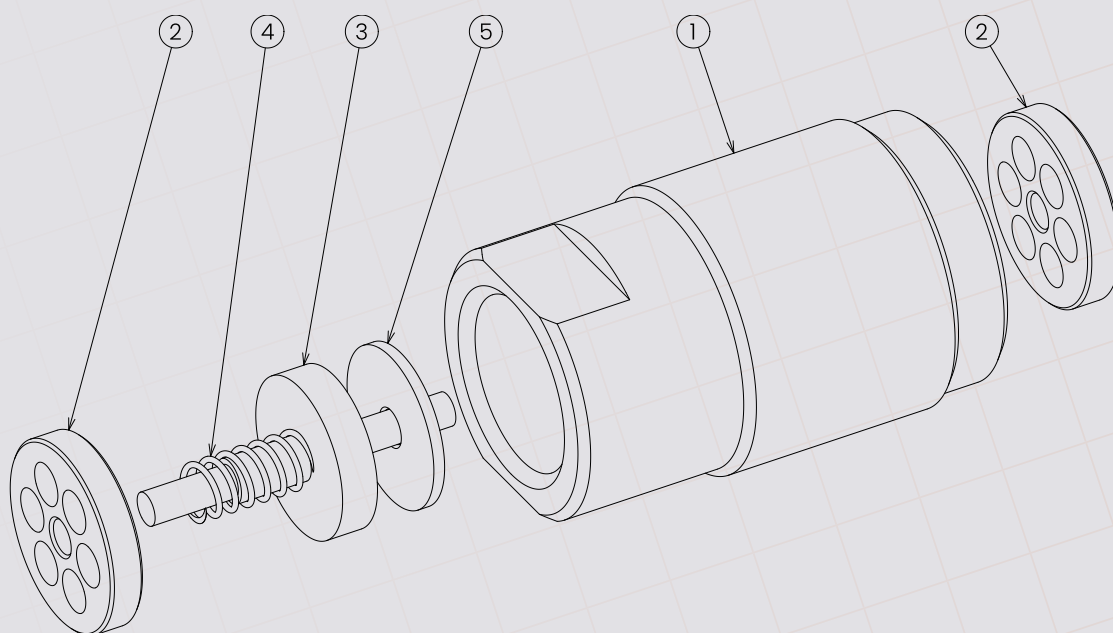



zellinger.it